



- Flexible body system
- Better than $\pm 0.5\%$ accuracy
- 4 - 20mA, 0 - 10V or 3.33mV/V output options
- 0-35 to 0-2000 bar / 0-500 to 0-30000 psi
- Internal 80% shunt calibration
- Standard Inconel diaphragm
- Optional auto-zero function
- Applications with process temperature of up to 400°C
- Maximum Torque:30Nm (22lbf ft)
- Optional safe relay function

MPTS series melt pressure sensors are used to measure the pressure and temperature of hot fluids in the plastics, rubber, food, etc. sectors. In this way, the quality of the production is higher and damage due to the high pressure is provided to the machine. They are ideal for the measurement of melt pressure in extrusion processes at temperatures of up to 400°C.

The MPTS series are low cost and high quality products. The MPTS makes mercury measurements in the series. In products in the health and food sector, oily measurements are made.

Designed to work directly with DCS and PLC thanks to analog output signals. EPA Series Digital Measuring and Control Devices are also available with the measured value being displayed.

TECHNICAL SPECIFICATIONS

Pressure Range	0~35 to 2000bar (0~500 to 0~30000psi)	Maximum Overload Pressure Rating	1.5 x FS(<1000bar) 1.2 x FS(>1000bar)
Accuracy	$\pm 0,5\%$ FS	Pressure Units	PSI, Bar, MPa or Kg/cm ²
Repeatability	$\pm 0,2\%$ FS	Internal Shunt Calibration	80%FSO $\pm 1\%$ FSO
Output Signal	4-20 mA, 0-10 V, 3.33mV/V	Measurement principle	4-arm bonded foil strain gage Wheatstone bridge
Supply Voltage	4-20 mA and 0-10V output models: 24VDC (recommended), 9...36 VDC 3.33mV/V output models: 10VDC (recommended), 6...12 VDC	Temperature sensor	-
Max. diaphragm temp.	400°C	Electrical Connection	6PIN, 7PIN, 8PIN
Zero shift due to temperature change	0.15 MPa/100°C	Max Torque	30Nm
Process Connection	1/2-20 UNF (45° conical seal) M14x1.5, M18x1.5, M22x1.5	Body	Titanium Nitride
		Diaphragm Material	Inconel

Safe relay function

An optional function available for excess pressure protection. The relay threshold is selected by customer at time of order.

Relay specifications :



- Rated current:1A
- Rated voltage:24vdc
- The relay contacts will open when the system is detected that the pressure exceeds the relay threshold

Auto-zero function



Sensors with an additional Auto-Zero function are extremely an high level of user-friendliness. The zero variations can be eliminated either directly on the unit itself or remotely from control room by shorting two pins.

ELECTRICAL CONNECTIONS



Current Output (4-20 mA, 2 wires)

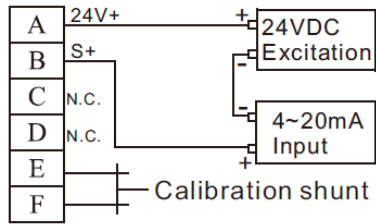



Voltage Output (0-10V)

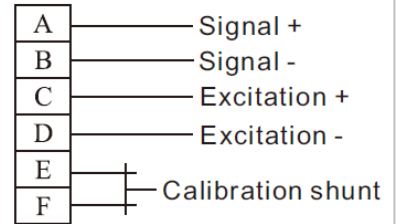



Auto-Zero (4-20 mA, 2 wires)

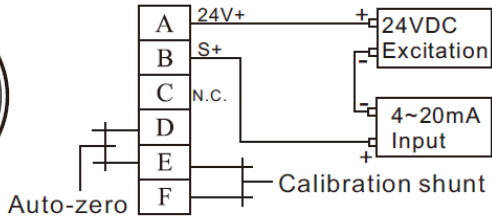



Auto-Zero (0-10V)

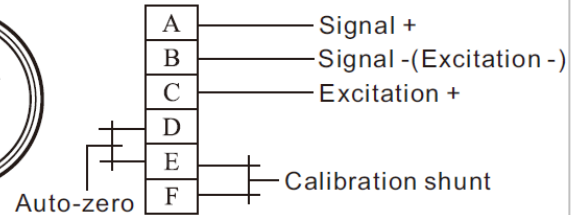

mV/V Output

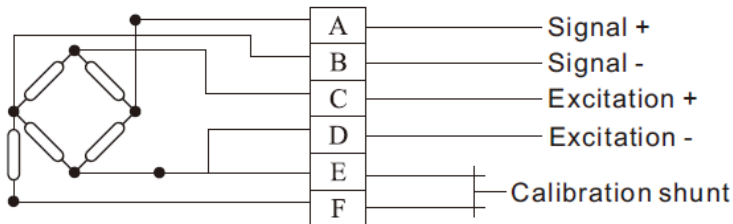

Safe Relay Switch (4-20 mA, 0-10V)

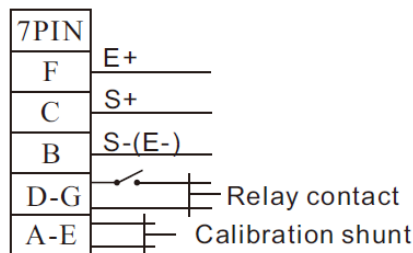

ACCESSORIES

Connectors

5PIN mating connector
6PIN mating connector
8PIN mating connector


Extension cables

5PIN/6PIN connector with 5m cable
5PIN/6PIN connector with 10m cable
5PIN/6PIN connector with 15m cable
5PIN/6PIN connector with 30m cable

Accessories

Mounting bracket
Drill kit (1/2"-20UNF,M18X1.5 etc)
Cleaning kit(1/2"-20UNF,M18X1.5 etc)
Thread adaptors

MECHANICAL DIMENSIONS

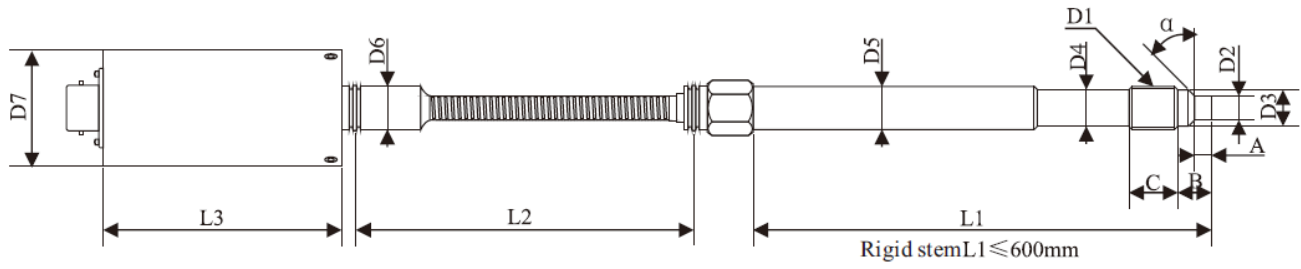

D1	M12X1.5	M14X1.5	1/2"-20	M18X1.5	M22X1.5	M28X1.5	G3/4"	PF3/8"	1½ -16"	3.25"	3.5"
D2	Ø7.8	Ø7.8	Ø7.8	Ø9.8	Ø9.8 Ø15.8	Ø17.8	Ø17.8	Ø9.8	Ø23.5	Ø23.5	Ø23.5
D3	Ø10	Ø11.8	Ø10.5	Ø15.5	Ø19.5	Ø24	Ø24	Ø14	Ø33.5	Ø33	Ø33
D4	Ø10	Ø12	Ø10.8	Ø16	Ø19.5	Ø25	Ø24	Ø14			
D5	Ø11.7	Ø13.8	Ø12.7	Ø17							
D6	Standard dimension Ø17; other dimensions can be customized										
D7	Standard dimension Ø38; other dimensions can be customized										
α	Standard angle 45°, other angle can be customized										
A	5.5	5.5	5.5	6	10	11	11	8	13	13.5	13.5
B	11	12.5	12	14	16	17	17	12	21	51	61
C	17	17	17	20	35	28	40	25	37	19	19
L1	Standard dimension 150 mm, other dimensions can be customized										
L2	Standard dimension 470 mm, other dimensions can be customized										
L3	Standard dimension 78 mm, other dimensions can be customized										
Conta	45° slopes					plain end face				flange installation	

ORDER CODE

Pressure Range

350Bar : 0...350 Bar
 500Bar : 0...500 Bar
 700Bar : 0...700 Bar
 1000Bar : 0...1000 Bar
 2000Bar : 0...2000 Bar

Body Length (L1/L2)

150/470 : 150 mm / 470mm

Model

MPTS - **123BC** - **350bar** - **1 / 2** - **150/470** - **V**

Body Model

123BC : Flexible Body (TiN Coating)

Mechanical Connection

1/2-20 : ½"-20 UNF
M14 : M14 x 1,5

Output Signal

0-10V : 0-10VDC
4-20mA : 4-20mA
3.33mV/V : 3,33mV/V

Atek Sensor Technologies



Tuzla KOSB Organize Sanayi Bölgesi Melek Aras Bulvarı, No:67 34956 Tuzla-İstanbul / TURKEY



Tel: +90 216 399 44 04



Fax: +90 216 399 44 02

